

PARTS LIST:

ASSEMBLED END PANEL-
CONFIGURATION WILL VARY QTY= 1

HARDWARE:

LEVELERS, 5/16"-18 X 1/2"L STEM QTY= 2
SCREW #12 X 3/4"L PPH QTY= VARIES

TOOLS REQ'D:

PORTABLE DRILL/DRIVER
#3 PHILLIPS SCREW DRIVER/BIT
BUBBLE LEVEL OR SIMILAR


***CAUTION: DO NOT PICK UP PLAY END PANEL BY THE TOP FRAME- THIS COULD CAUSE DAMAGE TO THE PRODUCT.
*TWO PEOPLE ARE REQ'D FOR INSTALLATION TO AVOID DAMAGE TO END PANEL!**

NOTES:


PLAY ACTIVITY END PANELS ARE AVAILABLE IN FOUR STANDARD SIZES IN ORDER TO FIT MOST SHELVING UNITS. THERE ARE VARIABLES FOR EACH INSTALLATION BASED ON WHICH SHELVING UNIT IS PRESENT AT THE JOBSITE. THE INSTALLATION PROCEDURE FOR THE DIFFERENT PLAY END PANELS WILL BE SIMILAR TO WHAT IS SHOWN HERE. PLAY ACTIVITY END PANELS SHIP FULLY ASSEMBLED. THE PLAY ACTIVITY END PANELS HAVE BEEN THOROUGHLY INSPECTED BEFORE FINAL PACKING FOR QUALITY CONTROL. PLEASE INSPECT THE END PANEL FOR ANY DAMAGE THAT MAY HAVE OCCURED DURING SHIPPING. WHILE THE PLAY ACTIVITY END PANELS ARE DESIGNED AND ENGINEERED TO BE HANDLED WITH EXTREME PLAY, 3BRANCH IS NOT RESPONSIBLE FOR THE WEAR AND TEAR TO THE PRODUCT OVER TIME. THINGS BREAK. :(

CLEANING AND CARE:


CLEAN WITH DAMP CLOTH. AVOID SURFACE CLEANERS WITH HARSH CHEMICALS

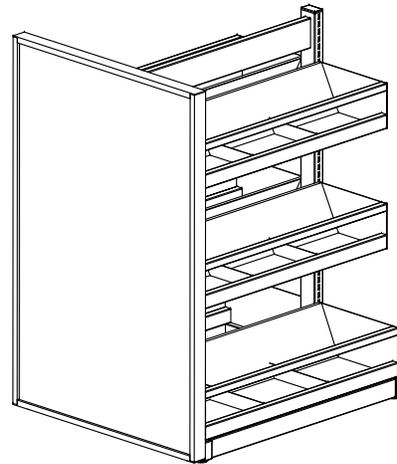


PLAY ACTIVITY END PANEL MOUNTED TO D/F SHELVING UNIT




LAMINATE/
MAGNETIC




FELT/HOOK &
LOOP




BUILDING BRICK



PEGBOARD



BALL DROP




COLOR WHEEL

PLAY ACTIVITY END PANEL OPTIONS

*NOT ALL VERSIONS & SIZES SHOWN

REV #	REVISION DESCRIPTION	DATE
*	*	*

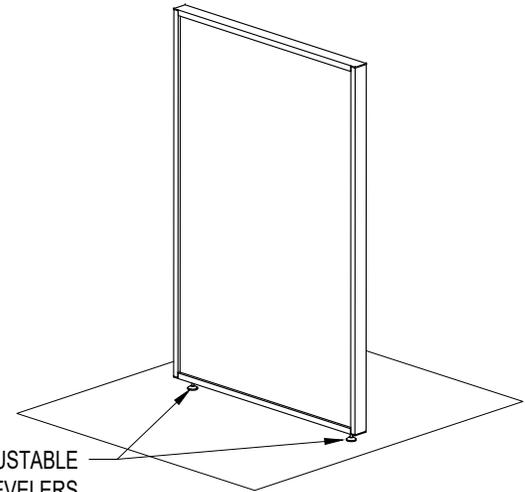

ADJUSTABLE
LEVELERS

STEP 1

LAY A CLEAN COVER ON FLOOR TO PROTECT FLOOR & PLAY END PANEL.


STEP 2

CAREFULLY REMOVE ALL PACKING MATERIAL FROM PLAY END PANEL BOX.

***CAUTION: DO NOT PICK UP PLAY END PANEL BY THE TOP FRAME- THIS COULD CAUSE DAMAGE TO THE PRODUCT.
TWO PEOPLE ARE REQ'D FOR PLAY END PANEL INSTALLATION TO AVOID DAMAGE TO END PANEL!**


STEP 3

LOCATE THE TWO ADJUSTABLE LEVELERS LOCATED IN THE BOTTOM OF THE PLAY END PANEL FRAME. TURN LEVELERS ALL THE WAY IN PRIOR TO INSTALLATION.

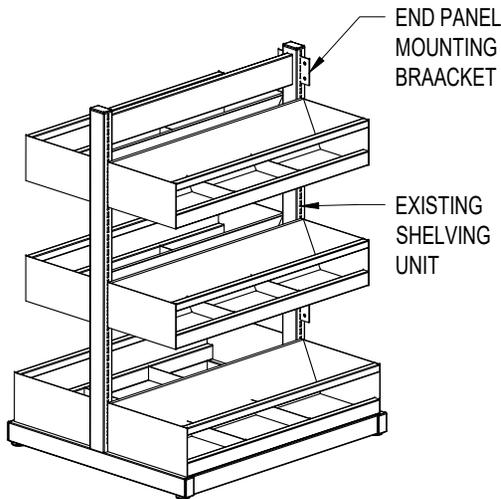

STEP 4

VERIFY THAT THERE ARE END PANEL MOUNTING BRACKETS ATTACHED TO THE SHELVING UNIT. THE BRACKETS SHOULD ALREADY BE ATTACHED TO THE SHELVING UNIT IF THE PLAY END PANEL IS REPLACING AN EXISTING END PANEL.
 NOTE: 3BRANCH DOES NOT PROVIDE THE MOUNTING BRACKETS. THE MOUNTING BRACKETS ARE PROVIDED BY THE SHELVING MANUFACTURER AND WILL VARY FROM THE DIFFERENT SHELVING MANUFACTURERS. THE ILLUSTRATION IS DEPICTING A GENERIC MOUNTING BRACKET.

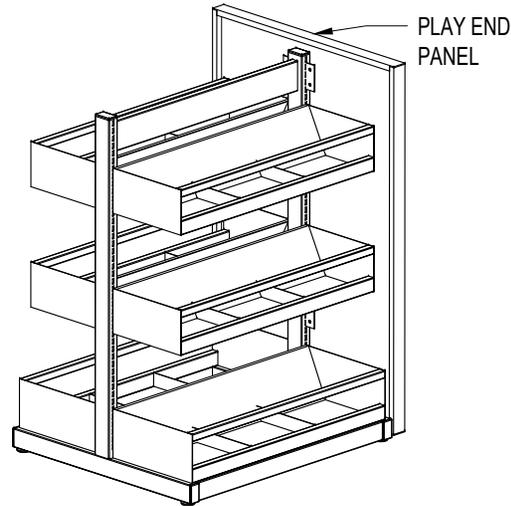


STEP 5

LOCATE THE PLAY END PANEL AT THE END OF THE SHELVING RUN AND PLACE THE END PANEL SECURELY AGAINST THE SHELVING UNIT FRAME.

STEP 6

CENTER THE PLAY END PANEL ON THE SHELVING UNIT END FRAME.
 LEVEL THE PLAY END PANEL WITH THE TWO ADJUSTABLE LEVELERS PROVIDED IN THE BOTTOM OF THE END PANEL.

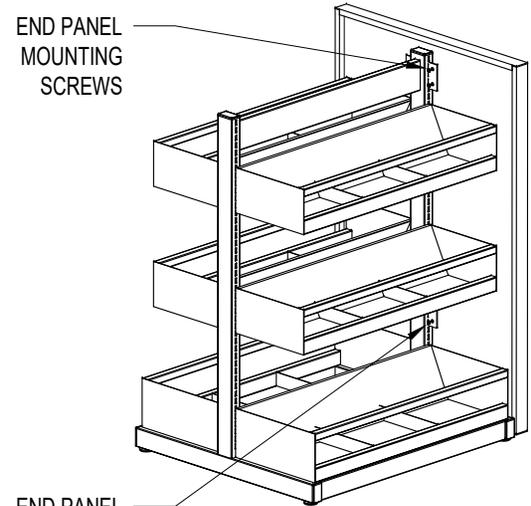

STEP 7

ATTACH THE PLAY END PANEL TO THE SHELVING UNIT WITH SCREWS PROVIDED BY 3BRANCH INSERTED THRU HOLES IN THE MOUNTING BRACKET AND THREADING INTO THE BACK PANEL OF THE PLAY END PANEL.

NOTE:

**THE PLAY END PANEL SHOULD BE SECURED TO THE SHELVING UNIT WITH A MINIMUM OF SIX SCREWS.
 DO NOT USE SCREWS LONGER THAN 3/4" TO ATTACH THE PLAY END PANEL.**

STEP 8

PROPERLY DISPOSE OF ALL PACKING AND SHIPPING MATERIALS.